

* NOTE

The IR format of the MusicCAST has been changed from 8bit typed custom code(well-known as YAMAHA NEC format) to 16bit typed though it's still NEC format.
Attached is an example of the set up process using Pronto(ProntoEdit) or RAV-2000(RAVedit).
Please see instructions.

REV 2


MCX-2000										
Function	Standard I/R						IR codes for Pronto(ProntoEdit) / RAV-2000(RAVedit)*			
	Custom Code				Data Code		Predefined format For TSU-6000/RAV-2000	Raw format For TSU-1000/2000/6000/RAV-2000		
STANDBY/ON	8	0	3	7	2	0	9000 006d 0002 0000 0080 0037 0020 00df	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
OPEN/CLOSE	8	0	3	7	2	1	9000 006d 0002 0000 0080 0037 0021 00de	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
PLAY	8	0	3	7	2	2	9000 006d 0002 0000 0080 0037 0022 00dd	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
PAUSE	8	0	3	7	2	3	9000 006d 0002 0000 0080 0037 0023 00dc	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
STOP	8	0	3	7	2	5	9000 006d 0002 0000 0080 0037 0025 00da	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
SCAN -	8	0	3	7	2	6	9000 006d 0002 0000 0080 0037 0026 00d9	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
SCAN +	8	0	3	7	2	7	9000 006d 0002 0000 0080 0037 0027 00d8	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 05e7 0157 0055 0016 0e3b		
SKIP -	8	0	3	7	2	8	9000 006d 0002 0000 0080 0037 0028 00d7	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0040 0016 0015 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		
SKIP +	8	0	3	7	2	9	9000 006d 0002 0000 0080 0037 0029 00d6	0000 006d 0024 0000 0157 00ab 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0040 0016 0040 0016 0015 0016 0040 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0015 0016 0040 0016 0015 0016 0040 0016 0015 0016 0015 0016 0015 0016 0040 0016 0040 0016 0015 0016 0040 0016 0015 0016 0040 0016 0040 0016 05e7 0157 0055 0016 0e3b		

[illegible]


[illegible]

<< For Pronto(TSU-1000/2000/6000) by using ProntoEdit ver 4.0.5 >>

1. Open the Button properties window and push Set IR button.



Raw code(For TSU-1000/2000/6000/RAV-2000)

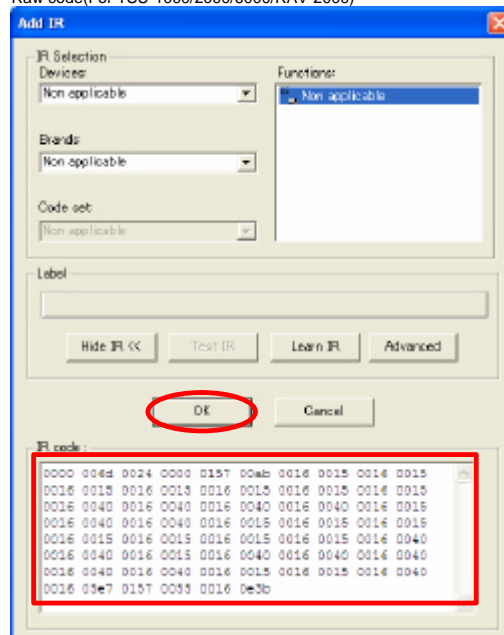

* NOTE : The following steps are for those who have sufficient experience using RAVedit.

Button Properties

Action | Properties | Icons | Colors

Alias: [C] UDB

Delay

Set IR

Beep

Timer

Jump: <none>

Delete

Double click

OK キャンセル 適用(A)

The 'Add IR' dialog box is shown with the following settings:

- Devices:** Amp
- Functions:** 3- stereo
- Brands:** Non Applicable
- Label:** (empty)

The 'View IR >>' button is circled in red.

Predefined format

Add IR

IR Selection

Devices: A ProC

Brands: Non Applicable

Functions:

- Infrared
- AC-8
- Acoustic Memo
- Acoustic Select
- Antennas
- Aur
- Balance Left
- Balance Right
- Bass Down
- Bass Up
- Boost
- ICD

Label

UDB

Hide IR << Test IR Learn IR Advanced

OK Cancel

IR code:

9000 0040 0002 0000 0080 0037 0040 000F

Raw format

Add IR

IR Selection

Device: A. Proc

Brand: Non Applicable

Functions:

- Single
- AC-S
- Acoustic Menu
- Acoustic Select
- Antisnooze
- AUX
- Balance Left
- Balance Right
- Bass Down
- Bass Up
- Boost
- ECO

Label

UDB

Hide IR << Test IR Learn IR Advanced

OK Cancel

IR code:

```

0000 000d 0024 0000 0157 00ab 0016 0015 0016 0015
0016 0013 0016 0013 0016 0013 0016 0013 0016 0013
0016 0040 0016 0040 0016 0040 0016 0040 0016 0016
0016 0040 0016 0040 0016 0015 0016 0016 0016 0016
0016 0015 0016 0015 0016 0015 0016 0015 0016 0040
0016 0040 0016 0015 0016 0040 0016 0040 0016 0040
0016 0040 0016 0040 0016 0015 0016 0015 0016 0040
0016 03e7 0157 0033 0016 0e3b

```